

Stabilization Soil Using Different Types of Admixtures

Mukesh Kumar

Lecturer, Deptt. of Civil Engg.
Ganga Technical Campus
Bahadurgarh, Jhajjar, Haryana, India
Mukeshharit42@gmail.com

Abstract

Utilization of industrial waste materials in the improvement of problematic soils is a cost efficient and environmental friendly method. It helps in reducing disposal problems caused by the various industrial wastes. However, it is essential to understand the performance of these waste products prior to use. The present paper evaluated the potential of granulated blast furnace slag (GBS) with fly ash to stabilize a soft soil. Soft soil samples were collected from Tatibandh-Atari, rural road of Raipur, Chhattisgarh. This soil was classified as CI-MI as per Indian Standard Classification system (ISCS). Different amounts of GBS, i.e. 3, 6, and 9% with different amount of fly ash i.e 3%, 6%, 9% and 12% were used to stabilize the soft soil. The performance of GBS with fly ash modified soils was evaluated using compaction and california bearing ratio (CBR) test. Based on these performance tests, optimum amount of GBS with fly ash was determined as 3% fly ash + 6% GBS. Reasonable improvement has been observed for unsoaked and soaked CBR value of soils with this optimum amount.

Keywords: *Admixture, Flyash, GBS*

1. INTRODUCTION

For centuries mankind was wondering at the instability of earth materials, especially expansive soil. One day they are dry and hard, and the next day wet and soft. Swelling soil always create problem for lightly loaded structure, by consolidating under load and by changing volumetrically along with seasonal moisture variation. As a result the superstructures usually counter excessive settlement and differential movements, resulting in damage to foundation systems, structural elements and architectural features. In a significant number of cases the structure becomes unstable or uninhabitable. Even when efforts are made to improve swelling soil, the lack of appropriate technology sometimes results volumetric change that are responsible for billion dollars damage each year. It is due to this that the present work is taken up. The purpose was to check the scope of improving bearing capacity value and reduce expansiveness by adding additives. There are many methods of stabilizing soil to gain required engineering specifications. These

methods range from mechanical to chemical stabilization. Most of these methods are relatively expensive to be implemented by slowly developing nations and the best way is to use locally available materials with relatively cheap costs affordable by their internal funds[1].

In many centuries, coal is the primary fuel in thermal power plant and other industry. The fine residue from these plants which is collected in a field is known as fly ash and considered as a waste material. The fly ash is disposed of either in the dry form or mixed with water and discharged in slurry into locations called ash ponds. The quantity of fly ash produced worldwide is huge and keeps increasing every day. Four countries, namely, China, India, United State and Poland alone produce more than 270 million tons of fly ash every year. This work has been done to see the effect on swelling aspect and on strength of some swelling soil by adding fly ash & lime in different proportion into it as additive. Soil stabilization improves the engineering properties of soil such as strength, volume stability and durability. The percentage addition of fine, coarse fly ash improves the strength of stabilized black cotton soil and exhibit relatively well-defined moisture-density relationship. It was found that the peak strength attained by fine fly ash mixture was 25% more when compared to coarse fly ash.[2] The addition of lime and class C fly ash to highly plastic clay also showed a reduction in shrinkage with increasing additive percentages. However, the addition of lime arrested the shrinkage at almost twice the rate of class C fly ash. The shrinkage arrest was not linear but occurred more readily with small amounts of additive and the rate of shrinkage arrest slowed as the amount of additive increased [3]. It is seen that the thickness of pavement decreases by 66% as the CBR value goes on increasing. The improved CBR value is due to addition of Lime and Fly ash as admixtures to the BC soil. It also reduces the hydraulic conductivity of BC soil. There will be no need of drainage layer after treatment of BC soil as sub grade with lime and fly ash. In combination, the admixtures are beneficial for lower plasticity and higher silt content soils. In terms of material cost, the use of less costly fly ash can reduce the required amount of lime [4]. This paper presents the results of the

Experimental study on expansive soil by stabilizing it with fly ash and lime. Compaction test and free swelling index test on fly ash –lime mixed swelling soil have been performed. The clayey soil was mixed with 5% lime and varying percentage of fly ash (5%,10%,15%,20%,25%) to see the effect on swelling aspect and optimum moisture content and modified dry density. The swelling potential, optimum moisture content and liquid limit decreases with increase in the fly ash content from 5%

2. Materials Used

(a) Soil:

The properties of the expansive clay used in this investigation are given below:

TABLE I. PROPERTIES OF SOIL

Properties	Soil
Grain size distribution	40% particles $\leq 2 \mu\text{m}$
Liquid Limit	57%
Plastic limit	30.43%
Plasticity Index	26.57% (CH) According to USCS
Free swelling index	100%

(b) **Lime:** Industrial grade lime approx 4kgs was purchased.

(c) **Fly ash:** Fly ash and Bottom ash (waste material) was collected from the Indraprastha Thermal Power Plant in Rajghat, New Delhi. Fly Ash was collected from the ash pond about 150 m from the thermal power plant. About 12kg of fly ash was collected. The Bottom ash approx 10 kg was collected from the boiler area. The fly ash was sieved and dried, in case of Bottom ash only drying was required.

TABLE II. RESULTS OF GEOTECHNICAL CLASSIFICATION TESTS OF FLY ASH

Properties	Rajghat Flyash
Grain size distribution	
Fine sand, 0.475-0.075mm	21 (%)
Silt size, 0.075-0.002mm	76 (%)
Clay size, 0.002mm	3 (%)
Liquid Limit	50%

3. Experiments

Fly Ash and Bottom Ash were mixed in a ratio of 4:1 i.e. (4 Parts of Fly Ash and 1 Part of Bottom Ash). In addition to the mixture, 5% of lime was also added to the soil mixture by weight. The percentage of Lime was maintained at a constant 5% by weight of the expansive soil sample, whereas the mixture of Fly Ash and bottom ash was increased in multiple percentages of 5% to obtain test samples on which tests were carried out and their properties studied. The proportions of flyash used along with the soil in the study are 5%, 10%, 15%, 20% and 25% respectively. The following Tests were performed in order to check the properties of the stabilized expansive soils:

- Liquid limit
- Free Swelling Index (F.S.I)
- Standard Proctor Test

All the tests were conducted in the controlled conditions as per the standard procedures given in the respective codes of Indian Standard.

4. Results and Discussion

Liquid Limit: The liquid limit (LL) is the water content at which a soil changes from plastic to liquid behavior.

From the above it shows that the liquid limit decreases with increase in the fly ash content from 5% to 25%. Free Swelling Index (F.S.I): Differential free swell test was performed in 100 ml cylindrical jar with 10 g soil sample. The graph showing variation of the readings for different samples in figure I.

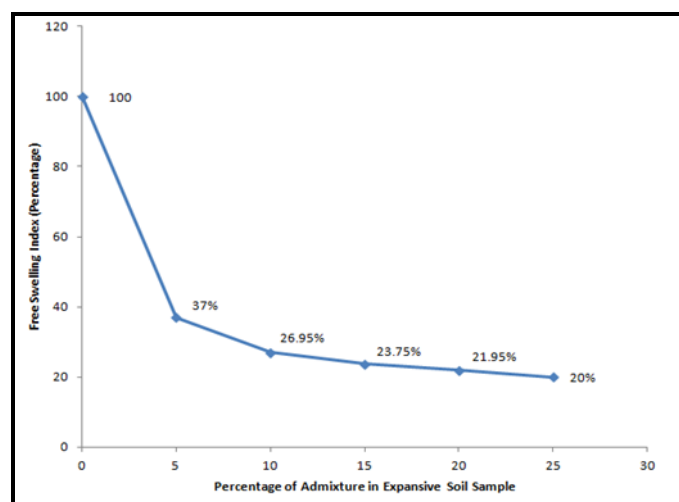


Fig. I. Correlation between FSI and percentage of admixture in soil.

Standard Proctor Test The degree of compaction of a soil is measured in terms of its dry density. The degree of compaction mainly depends upon its moisture content,

compaction energy and type of soil. For a given compaction energy every soil attains the maximum dry density at a particular water content which is known as optimum moisture content. The readings for different Percentage are as below:

TABLE III LIQUID LIMITS OF VARIOUS COMBINATION STUDIED

S. No	Samples	Liquid Limit
1	SOIL SAMPLE +5% LIME +5%(FA+BA)	54.7
2	SOIL SAMPLE +5% LIME +10%(FA+BA)	51.1
3	SOIL SAMPLE +5% LIME +15%(FA+BA)	48.42
4	SOIL SAMPLE +5% LIME +20%(FA+BA)	47.67
5	SOIL SAMPLE +5% LIME +25%(FA+BA)	44.02

5. Conclusion

In this study of stabilization of soil addition of admixture in soil increase the strength of soil which will load bearing capacity will increase. Flyash has proven to be better admixture if compare to other admixture studied.

References

- [1] G. Rajasekaran, "Sulphate attack and ettringite formation in the lime and cement stabilized marine clays". J. of Ocean engg., 32, 2005, pp.1133–1159.
- [2] Hossein Moayedi et al, "Stabilization of organic soil using sodium silicate system grout" International Journal of Physical Sciences, Vol. 7(9), pp.- 1395-1402.
- [3] Anitha K.R. et al, "Effect of RBI Grade 81 on Different Types of Subgarde Soil", 10th National Conference on Technological Trends (NCTT09) 6-7 Nov. 2009
- [4] Sridharan, A., Prashanth, J.P., and Sivapullaiah, P.V. (1997). "Effect of fly ash on the unconfined strength of black cotton soil". Ground Improvement, 1, 169-175.