

Experimental Study on Usage of Tyre Scraps as a Stabilizing Material for Subgrade of Flexible Pavement

Sandeep¹, Shivani² and Naresh³

¹M.Tech. Scholar, Department of Civil Engineering, Satpriya Group of Institutions, Rohtak, Haryana
maliksandeep2811@gmail.com

²Assistant Professor, Department of Civil Engineering, Satpriya group of Institutions, Rohtak, Haryana
shinu174@gmail.com

³M.Tech. Scholar, Department of Civil Engineering, Satpriya Group of Institutions, Rohtak, Haryana
nareshrathi0188@gmail.com

Abstract

This enquiry examines the appropriateness of waste capitals such as marble powder, toy chips, then tyre scraps for use as soil stabilizers in pavement. The effects of marble dust, “marble chips, and tyre scraps on the properties of expanding sub grade material are investigated. It is also investigated how much money may be saved on a pavement when it is stabilized independently using marble dust, marble chips, and tyre scraps. Wet sieve analysis, Liquid Limit, and Plastic Limit tests were used to investigate the physical properties of clay and marble dust at first. The California Bearing Ratio (CBR) tests were then performed to determine the strength of virgin and stabilized materials. As the CBR value is enhanced, the findings of the experimental investigation reveal that marble dust, marble chips, and tyre s bris can be employed effectively as soil stabilizers for sub grade. When the expanding clay soil is stabilized using marble dust, marble chips, and tyre scraps, significant cost savings are possible.

Keywords: *Pavement, Stabilizer, sub grade, expansive.*

Introduction

If not properly handled, expansive soils can cause considerable damage to structures. Various researchers' extensive laboratory and field testing have revealed positive outcomes for the application of such expanding soil after stabilization using added stabilizers. Because of the enhanced strength and load distributing capabilities that these materials can provide, the use of stabilization to improve the qualities of a material is becoming increasingly common.

Ultimately the main reason for using stabilization usually is cost savings. The cost savings associated with stabilization can take many forms including reduced construction costs, reduced maintenance costs throughout the life of the pavement or an extension of the normal pavement life. Pavement design is based on the premise that minimum specified structural quality will be achieved for each layer of material in the pavement system. Each layer must resist shearing, avoid excessive deflections that cause fatigue cracking within the layer or in overlying layers, and prevent excessive permanent deformation through densification. As the quality of a soil layer is

improved, the ability of that layer to distribute the load over a greater area is generally enhanced so that a reduction in the required thickness of the soil and surface layers may be permitted. The structure of the pavement is shown in fig 1.

As per IRC: 37- 2001 (1) the sub grade must have a minimum CBR value of 2%. When any material present as a sub grade material does not conform to this specification, capping layer of any suitable material whose California Bearing Ratio (CBR) value not less than 10% must be provided amongst the sub grade and the sub base. If expansive soil is present as a sub grade material, buffer layer of thickness ranging from 0.6m to 1.0m need to be provided between the sub grade and the sub base in addition to the arrived thickness of the pavement”.

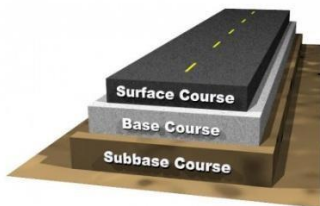


Fig 1 Pavement structure

“A base course is defined as a layer of granular material which lies immediately “below the wearing surface of the pavement. The base course must have a minimum CBR value of 80%. The recommended minimum thickness of granular base is 225mm for traffic upto 2 msa and 250mm for traffic exceeding 2 msa.

Around 4000 marble mines and 1100 marble processing units spread over various regions in India generate huge quantity of Marble Dust (MD) and Marble Chips (MC) during processing and slabbing of marble stones. Indiscriminate disposal of marble dust on road sides is causing problems of poor

drainage, air pollution and damage of agricultural land. In order to minimize these illnesses, the waste marble dust and marble chips can effectively be used as a stabilizing agent for clay and red soils.

Tyre Scraps (TS) perhaps rank among the most extensively researched and implemented recycled materials in recent years. Approximately 200,000 tons of tyre scraps are collected each year, out of which 1,50,000 tones are recycled and reused. The remaining 50,000 tons remain as waste which can be potentially used for roadway applications in the field of stabilizing the subgrade and sub base”.



Fig 2 Tyre Scraps

On the whole, the CBR charge of sub grade motivation be increased “when marble dust, marble chips, and tyre scraps are used as stabilizing agent for pavement materials.

2. OBJECTIVES OF THE INVESTIGATION

In order to use the existing soil to construct the roads, various tests were planned to conduct on existing sub grade soil samples without stabilization and with stabilization using locally available materials like lime with Fly Ash to achieve the desired parameters suitable for the construction of the road sections.

This includes: Š

- Determination of the engineering properties of original soil to determine its suitability for embankment.
- Determination of the engineering properties of modified soil to make it suitable for the design of
- Design Flexible pavement as per

improved CBR of expansive soil (clayey sub grade)".

3. LITERATURE REVIEW

Stephen (1995) (13) has described that "flexible pavement design deals primarily with structural aspects (i.e., the selection of appropriate materials, characterization of strength or load-carrying properties, layer thickness determination. He has developed analytical models, transfer functions, traffic loading simulation models, material characterization methodologies and life cycle cost analysis to predict the state of stress in pavement layers when different types of soil stabilizers are used for sub grade strengthening.

To understand the optical properties of mineral dust Lyn et al (2002) (6) has computed optical properties for a variety of particle shapes and sizes up to equivalent-volume size parameter $X = 27\pi r/A = 8$, and they have performed laboratory measurements on a variety of mineral powders in the same size regime and somewhat larger.

Enzymes as soil stabilizers have been used by Mihai et al (1990) (8) to improve the strength of sub grades due to low cost and relatively wide applicability compared to standard stabilizers. Two types of soils (soil I and II) and two enzyme products (A and B) were taken for the study. The specimens were subjected to resilient modulus testing and shear strength testing. The stiffness of soil I was increased in average by 69% and by 77% for soil II. The type of soil affected significantly the effectiveness of the treatments.

Guidelines and standards have been developed by Asmidar et al (2008) (2) to assist practitioners in designing pavements after subgrade stabilization. The laboratory tests carried out on two most common types of residual soils, namely the granite residual soils and sedimentary residual soils showed that soils mixed with 8% cement appeared to exhibit a marked increase in strength to meet therequirement as sub-base material. With more cement added, there was further increase in the

strength of the stabilized soils. In some cases, the strength gain with 12% cement was sufficient to meet the requirement as base material. Soil with more coarse material exhibited higher Unconfined Compressive Strength (UCS) value.

Alaa et al (2006) (1) have reported that the use of recycled materials to stabilize marginal soils offers a viable alternative from economical, technical, and environmental standpoints. Recycled materials provide an attractive alternative to traditional Engineering construction materials such as asphalt, concrete, natural aggregate and others. In addition to a lower cost in comparison to traditional materials, their use has the potential to alleviate landfill problems as well as avert costs typically associated with their disposal. Mehmet et al (2008) (7) have described the usability of the pumice as a stabilization material in the sub base considering volumetric unit weight. Initially, the physical properties of lightweight aggregate material have been analyzed. For the research, few experiments have been carried out such as stability to freeze, solidity, strength, Atterberg limits and CBR. A rise of 93% of CBR value was observed after the stabilization process.

Robert (2009) (11) has suggested that the strength of expansive soil can be increased when it is stabilized using rice husk ash (RHA) and fly ash, which are waste materials. Stress strain behavior of unconfined compressive strength showed that failure stress and strains increased by 106% and 50% respectively when the fly ash content was increased from 0 to 25%. When the RHA content was increased from 0 to 12%, Unconfined Compressive Stress increased by 97% while CBR improved by 47%. Therefore, an RHA content of 12% and a fly ash content of 25% are recommended for strengthening the expansive sub grade soil. A fly ash content of 15% is recommended for forming a swell reduction layer because of its satisfactory performance in the laboratory tests.

Onur (2009) (10) has made a study in which waste limestone dust and waste dolomite marble dust, by-products of marble industry,

were used for stabilization of expansive soils. Waste limestone dust and waste dolomite marble dust were added to the expansive soil with predetermined percentage of stabilizer varying from 0 to 30 percent. Grain size distribution, consistency limits, chemical and mineralogical composition, swelling percentage, and rate of swell were determined for the samples. Swelling percentage decreased with increase in stabilizer percentage.

Hurley and Thornburn (1972) (4) have summarized pertinent information on stabilizer properties, reaction mechanisms, injection methods of soil solidification, properties of stabilizer soil mixtures, and use of sodium silicates as dust proofers and water proofers and as secondary additives with other stabilizers. Sodium silicates with or without the addition of precipitants are of little value in dust proofing or waterproofing fine-grained soils.

Dallas and Syam (2009) (3) have studied the process of soil stabilization with the traditional calcium-based stabilizers, Portland cement, lime, and fly ash. The report describes and compares the basic reactions that occur between these stabilizers and soil and the mechanisms that result in stabilization.

4. MATERIALS AND METHODS

Material collection

Expansive clay has been collected from various areas like Ganapathy area in Coimbatore city. Marble Dust and Marble Chips have been collected from marble cutting units like Sharma Marbles and Kamadhenu Marbles in Thadagam road in Coimbatore city. Tyre Scraps has been collected from Star Tyre Retrading Company in Erode.

Testing of materials

The physical properties of clay, and marble dust have been studied by conducting wet sieve analysis, dry sieve analysis, Liquid Limit (LL) and Plastic Limit (PL) tests.

Optimum proportion of marble dust to be

mixed with clay (subgrade) has been arrived at so as to have a mix with a Plasticity Index (PI) of 6% or less. Optimum moisture content has been found out by carrying out Standard Proctor Compaction Test (SPCT).

The change in strength of clay after being mixed with marble dust, and tyre scraps has been determined by conducting California Bearing Ratio (CBR) test. Based on the test results, flexible pavement has been designed with and without buffer layer and the percentage of cost savings of stabilized pavement with respect to unstabilized pavement is arrived.

Wet sieve analysis

50 g in each of clay and marble dust, quarry dust and red soil is taken separately and wet sieved through 75 micron sieve and percentage of fines is found out”.

Liquid limit test

This test is done as per IS: 2720 (Part 5) – 1970.



Fig 4 Casagrande's liquid limit apparatus

The empirical formula meant for calculation of liquid limit in the one – point method is given by,
Liquid limit = $WN / (1.3215 - 0.23 \log N)$

Plastic Limit test

“This test is done as per IS: 2720 (Part 5) –

1970. The water content at which the soil can be rolled into a thread of approximately 3mm in diameter without crumbling is known as the plastic limit.

Standard Proctor Compaction Test

The objective of Standard Proctor Compaction Test is to determine the Optimum Moisture Content (OMC) so that it could be used for compacting the pavement material in the CBR mould. This value ensures maximum dry density and hence minimum void ratio and maximum strength. A plot of dry density vs. moisture content is plotted and optimum moisture content is determined.

California Bearing Ratio test

The California Bearing Ratio test is a penetration test meant for the evaluation of sub grade strength of roads and pavements. The results obtained based on these tests are used with the empirical curves to determine the thickness of pavement and its component layers. This is the most widely used method for the design of flexible pavement”.



Fig 5 CBR apparatus


“Record the load readings at penetrations of 0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 7.5, 10 and 12.5 mm. A plot of load vs. penetration of the plunger is plotted and CBR value is calculated.

$$\text{CBR}_{2.5} = (\text{Load}_{2.5} / 1370) * 100 \%$$

$$\text{CBR}_{5.0} = (\text{Load}_{5.0} / 2055) * 100 \%$$

The CBR values are usually calculated for penetration of 2.5 mm and 5 mm. Generally the CBR value at 2.5 mm will be greater than at 5

mm and in such a case the former shall be taken as the design CBR. If CBR for 5 mm exceeds that of 2.5 mm, the test should be repeated. If similar results follow, the CBR corresponding to 5 mm penetration should be taken design CBR”.

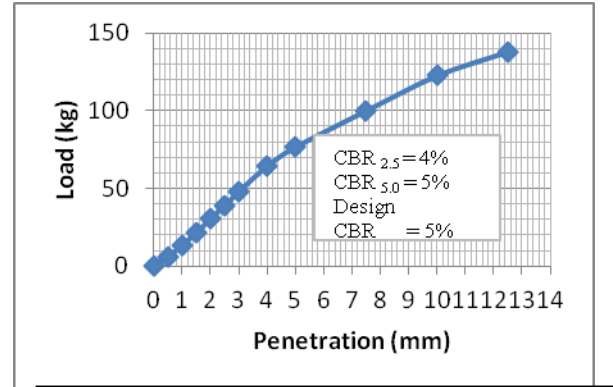

“Comparing fig 7 and 10, it is evident that the CBR value of clay is increased from 0.6% to 5% when stabilized with marble dust and tyre scraps”.

1. Design of Flexible Pavement

Pavement design with buffer layer

“As per clause 4.2.1.5 of IRC: 37-2001, the sub grade must have a minimum CBR value of 2%. When the CBR is less than 2%, then capping layer of 150mm thick need to be provided between the sub grade and the sub base layer. When highly expansive soil is present as a sub grade material, buffer layer having thickness ranging from 0.6m to 1.0m need to be provided.

The very high value of liquid limit (i.e) 51% indicated that the clay is expansive. Hence buffer layer has to be provided to increase the performance of the pavement.

The first step in pavement design is to estimate the cumulative number of standard axles to be catered for the design which is calculated as follows”:

“The relevant data assumed are,

As per clause 3.3.2.2 of IRC37:2001, an average annual growth rate of 7.5% is adopted.(i.e.) $r = 0.075$

As per clause 3.3.5.1 of IRC37:2001, for single lane carriageway, the lane distribution factor is 100%.

(i.e.) $D = 1$

The number of commercial vehicles is assumed to be 120 cv/day.

As per clause 3.3.4.4 of IRC37:2001, for the assumed value of 120 cv/day and for the terrain type of rolling plain, the vehicle damage factor is taken as 2.5.

As per clause

3.3.3.2 of IRC37:200

1, the design life is taken as 15 years.

(i.e.) $n = 15$ years

The number of years between last count and year of completion of construction is assumed as 2 years.

Therefore, $A = 120 (1+0.075)^2 = 139$

N can be calculated as,

$N = \{365 [(1+0.075)^{15} - 1] * 139 * 0.6 * 2.5\} / 0.075 = 2 \text{ msa}$

From plate 1 of IRC37:2001”,

“For the minimum CBR value of 2%, the total pavement thickness is 715mm. The recommended pavement structure

Pavement design without buffer layer

The clay, marble dust, and tyre scraps mixture's CBR test results yielded a 5-percent CBR value. The total pavement thickness with a CBR value of 5% is 490mm. The paving pattern is, The quantity of various materials and cost of pavement per unit area for pavement structure with buffer layer are given.

The quantity of various materials and cost of pavement per unit area for pavement structure without buffer layer, when the subgrade is stabilized with tyre scraps.

Layer – calculation of quantities

Comparison shows a cost reduction of 27.7% when the expansive subgrade is treated with tyre scraps.

5. SUMMARY AND CONCLUSIONS

From the experiments, test results and discussion, the following conclusions have been made:

The stabilization process of clay Marble Dust (MD) and Marble Chips (MC) is very effective. The CBR value of clay when stabilized with MD is increased from 0.6% to 5%. The CBR value of clay when stabilized with tyre scraps is increased from 0.6% to 5% for use as a subgrade.

Addition of MD to expansive subgrade not only reduces expansive nature of subgrade but also increases its CBR value.

Reduction of expansive nature of subgrade eliminates buffer layer and increases the CBR value and hence reduces the overall thickness of pavement.

Elimination of buffer layer and reduction of overall thickness of pavement offsets the cost and mixing cost of Marble Dust and Tyre Scraps with clay so much that a reduction in overall cost of 27.7% is effected”, respectively.

REFERENCES

- [1] Alaa, A., Rory, M., Delfin, C., Fikret, A., Stabilization of marginal soils using recycled materials, Final report, Florida Department of Transportation BD – 544 – 4, p. 1 – 180, February 2006.
- [2] Asmidar, A., Bujang, B. K., Azlan, A., Evaluation, selection and assessment of guidelines for chemical stabilization of tropical residual soils, American Journal of

- Environmental Sciences, Vol. 4, No. 4, p. 303 – 309, November 2006.
- [3] Dallas, N., Syam, N., Recommended practice for stabilization of sub grade soils and base materials, Contractor's final task report for NCHRP Project 20 -07, p. 63 – 67, August 2006.
- [4] Hurley, R., Thornburn, M., Ability of a clay fill to support construction plant, Journal of Terramechanics, Vol. 2, No. 4, p. 34 – 39, November 2007.
- [5] Katebi, H., Lime Stabilization of calcareous soil, Journal of the Institution of engineers (India), Vol. 90, p. 3 – 6, May 2007.
- [6] Lyn, R., Martin, G., Robert, A., Optical properties of small mineral dust particles at visible and near IR wavelengths: Numerical calculation and laboratory measurement, Proceedings of the Atmospheric aerosols Global Climatology and Radioactive Characteristics, Vol. 16, p. 1198 – 1200, June 2008.
- [7] Mehmet, S., Selcan Findi, K. F., Stabilization of sub base layer materials with waste pumice in flexible pavement, Building and Environment, Vol. 43, p. 415 – 421, May 2008.
- [8] Mihai, O., Raul, V., Ray, H., Tim, C., Preliminary laboratory investigation of enzyme solutions as a soil stabilizer, Georgia Tech Project E 20 – 634, p. 1 – 102, December 2009.
- [9] Misra. A. K., Mathur. R., Rao. Y. V., Singh. A. P., Goel. P., A new technology of marble slurry waste utilization in roads, Journal of Scientific and Industrial Research, Vol. 69, p. 67 –72, January 2010.
- [10] Onur, B., Stabilization of expansive soils using waste marble dust, International Journal of Natural and applied Sciences, Vol. 4, p. 5 – 9, February 2010.
- [11] Robert Brooks, M., Soil stabilization with fly ash and rice husk ash, International Journal of Research and reviews in Applied Sciences, Vol. 1, No. 3, p. 209 – 3217, December 2010.
- [12] Samson, M., Selvi, P., Velliangiri, K. B., A study on Engineering properties of cement stabilized seashore soils, National Building Material and Construction Week, p. 156 – 167, January 2014.
- [13] Stephen, B., Flexible pavement design – summary of the state of the art, Proceedings of the committee on flexible pavement design, p. 1 – 7, May 2016.